
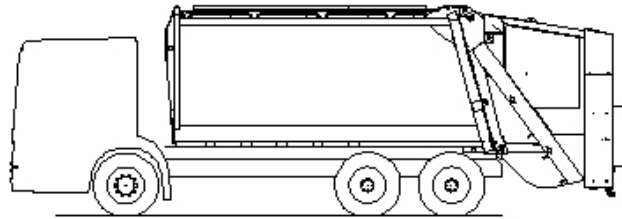


# Geesink Norba MF 24H25



The MF300 multifraction rear-loading vehicle offers two smooth-sided, sealed, independent bodies, each with its own compaction and ejection plates. The independent tailgates prevent any cross-contamination between waste streams.

The Smart pack System™ controls bin lift speeds and other functions independently of the loading weight. Automatic sensing of how much pressure is needed helps fuel economy.

They can operate with open back or with bin lifts that can be single or double and manual or automatic. In-cab controls allow adjustment of operational variables including compaction parameters.

The vehicle is available with the super-green Plug-in Electric functionality. The market-leading Eurovim telematics system is built in and the Eurovim Plus can be added.

For further information contact us on 01443 220633 or 07801 809240.

To arrange a demonstration of this vehicle contact us on 01443 220635.

To get a quote on the cost of this vehicle contact us on 01443 220632.



## GEESINKNORBA

Llantrisant Business Park Llantrisant Pontyclun CF72 8XZ

Tel: +44(0)1443 222301 Fax: +44(0)1443 220 637

[www.geesinknorba.com](http://www.geesinknorba.com) [sales.uk@geesinknorba.com](mailto:sales.uk@geesinknorba.com)

## MF 24H25

Series	MF
Formerly known as	24
Product name	MF 24H25
Uses	Mutifractional
Body fabrication	Fully Welded
Body access door	Body access door to both sides
Body construction	Smooth sided
Width	the widest point of the body, 2500 mm
Body capacity	left 2/3, right 1/3, 24 m3
Height	from bottom of the bottom of the body to the top, 2400 mm
Length	Body, 6375 mm
Blade back off relief valve	Yes
Floor and Side Walls Construction	High Tensile
Cycle time packing mechanism	let 11-13 seconds, right 10-13 seconds
Automatic Discharge Clearing Cycle	Yes
Packing mechanism in matt black	Yes, Colour coding chargeable extra
Automatic Integral Tailgate Locks	Yes, Adjustable
Maintenance of Carriage Plate	Easy maintenance without removing carriage plate
Slide Blocks	Nylon 66
Ejector Blade in matt black	Yes
Double Acting Ejector Cylinder	Yes
Maintenance of Ejector Blade	Easy maintenance without removing ejector blade
Pump	Smartpack (Variable) Pump
Hydraulic tank volume	195 litres
Sensors	Load sense
Pressure control valves	Yes
Main relief valve setting	255 bar
Adjustable Counter Pressure Operated from Display in Chassis Cabin Control Box	For Both Compartments

## MF 24H25

User programmable pressure settings	In Cabin Control Box
Fault diagnosis remote	With optional Modem
Controls	Euro Vim Can Bus System
Bin Lift Counter on Integrated Models	In Cabin Control Box
Press Cycle Counter	In Cabin Control Box
Fault diagnosis	In Cabin Control Box
Operating Hour Counter	In Cabin Control Box
Lubrication	Manual or central automatic
Compliance	EN1501
Manuals/training	Scheduled operator training available. User and Service manual supplied
Warranty	1 year standard parts and labour warranty with optional extension packages
Geesinknorba L550M F Auto	Yes
Geesinknorba L500MF	Yes
Third Party Binlifts available on request	Yes
Open back	Yes
Geesinknorba L200	